




Rec'd Patent 10/511824  
19 OCT 2004  
PCT/GB 2003 / 0 0 0 6 6 7



INVESTOR IN PEOPLE

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)




The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

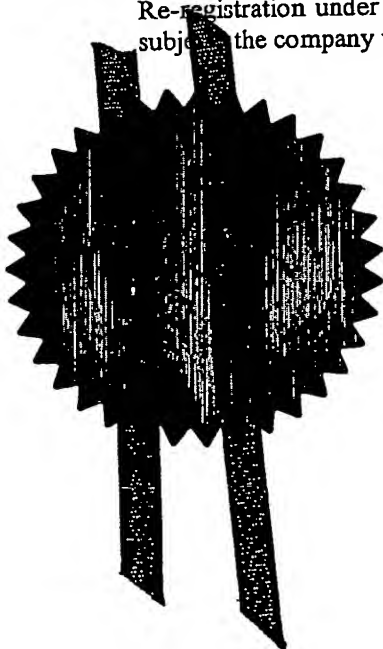

Signed *R. Mahoney*  
Dated 1 August 2002

An Executive Agency of the Department of Trade and Industry

**BEST AVAILABLE COPY**


The  
Patent  
Office

1/77

Patents Act 1977  
Rule 16

24APR02 E713477-1 D00611  
P01/7700 0.00-0209305.2

Request for grant of a patent

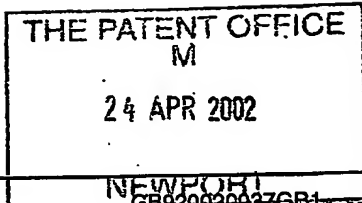

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales NP10 8QQ

1.	Your reference	NEWPORT GB920020037GB1		
2.	Patent application number (The Patent Office will fill in this part)	0209305.2	24 APR 2002	
3.	Full name, address and postcode of the or of each applicant ( <i>underline all surnames</i> )	INTERNATIONAL BUSINESS MACHINES CORPORATION Armonk New York 10504 United States of America		
	Patents ADP number ( <i>if you know it</i> )			
	If the applicant is a corporate body, give the country/state of its incorporation	State of New York United States of America 519637001		
4.	Title of the invention	CABLE INSTALLATION		
5.	Name of your agent ( <i>if you have one</i> )	R D Moss		
	"Address for Service" in the United Kingdom to which all correspondence should be sent ( <i>including the postcode</i> )	IBM United Kingdom Limited Intellectual Property Department Hursley Park Winchester Hampshire SO21 2JN		
	Patents ADP number ( <i>if you know it</i> )	6847766001		
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and ( <i>if you know it</i> ) the or each application number	Country	Priority App No ( <i>if you know it</i> )	Date of filing ( <i>day/month/year</i> )
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	No of earlier application	Date of filing ( <i>day/month/year</i> )	

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:  
a) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body.)
- Yes

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 7 ✓  
Claim(s) 2 ✓  
Abstract 1 ✓  
Drawing(s) 5 + 5 ✓

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 2 ✓


Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application



Signature

R D Moss

23 April 2002  
Date

12.

Name and daytime telephone number of person to contact in the United Kingdom

J N Watson  
01962 818955

**CABLE INSTALLATION**Field of the invention

5           The present invention relates to the installation of cabling.

Background of the invention

10           Twisted pair copper cabling has traditionally been used within buildings to carry voice and data to end-user equipment such as computers, telephones and the like and typically hundreds of metres of cabling has to be run above ceiling or under floor to reach that user equipment.

15           Figure 1 shows the components involved in installing such cabling according to the prior art. Installers typically pull such cables in from a drum 10 containing 500 metres of cable 20. The end of the cable 20 is placed in a pulling sock 30 made of a steel lattice and as the cable is pulled this lattice tightens around the length of cable it surrounds to securely grip it.

20           Potential damage to the cables during the installation process caused by over stretching of the twisted pair conductors inside the insulating sheath is a big problem. Over stretching causes the distance between the twisted pairs to be reduced giving rise to an increase in cross-talk and  
25           reducing the effectiveness of the cables. Thus a pulling fuse 40 or similar device (such as the magnetic linkage disclosed in copending patent application GB0118861.4) is used to prevent too great a force being applied to the cable during the installation process (the linkage is adapted to break when a predetermined force is applied and has to be reset before  
30           installation can continue). Attached to the other end of the pulling fuse via the fuse's quick release loop is a handle 50 used by the installers to manually pull the cable into position.

35           The onset of Cat 6 / 7 standards has placed demands on manufacturers for even greater performance and bandwidth. Cabling such as Shielded Foiled Twisted Pair (SFTP) has been developed to meet these increased demands. With such cabling, each twisted pair conductor is surrounded by a layer of aluminium foil. All the pairs are then covered by a further layer of foil and then a braided shield. This new configuration permits a higher  
40           transfer rate and is even more highly dependent upon the precise positioning of the twisted pair conductors within the cabling sheath.

          The use of a pulling sock is not suitable for gripping these new cables for a number of reasons. Current pulling socks are designed for

much thicker cables and it is physically difficult to make them small enough to grip the newer type of cable securely. Further, the length of the cable gripped by the pulling sock has to be thrown away. This is because, the gripping action of the sock is likely to have displaced the conductors within the cabling sheath and thus this part of the cable cannot be relied upon to work properly.

Further, the pulling sock is required to be relatively long in order to achieve a sufficient clamping force on the cable. This is because the sock's steel lattice only tightens around the cable as it is pulled. If the sock was any shorter, the cable might well have been pulled out of the sock before the steel lattice had a chance to grip it properly. The length of the pulling sock means that a large amount of cable is wasted.

WO 00/60714 discloses a device for connecting a wire or cable enabling the traction thereof. This device comprises a ring provided with one or several longitudinal grooves, an end piece provided with the same number of longitudinal grooves as in the ring and designed to fit inside said ring, whereby the longitudinal grooves in the end piece and the ring, when they are located opposite each other, form at least one housing that is adapted to the section of each wire, means (preferably by screwing) that lock the end piece inside the ring in an angular locking position where the corresponding grooves are offset in relation to the others, and protruding elements (threads on the inner side of the ring for example) that are adapted to grasp each wire of the cable in said locking position. This device can be used for drawing wires or electric cables in ducts or casings.

#### Summary of the Invention

Accordingly, the invention provides a device for gripping a cable, comprising an elongated housing for slidably receiving the cable axially thereof, the housing being configured to permit an end of the cable to leave the housing and be received back by the housing to form a loop, the device further including means for securing at least the part of the cable received back by the housing.

The device is intended to be used in place of the prior art pulling sock shown in figure 1. The prior art pulling sock has a loop which permits it to be attached to a pulling fuse or similar device. The device of WO 00/60714 also has a cavity in the device's head which permits its fixing with a means of traction. The gripping device of the present invention is not supplied with a loop or other means of traction. Instead the cable itself is used to form a loop by which the cable can be attached

to the pulling fuse or similar device. (Of course, the gripping device could be attached directly to a handle or a pulling rope, but this would risk the installers inadvertently over stretching the cable and thereby damaging it).

Using the cable loop as an attachment means is particularly advantageous. This reduces the number of parts that need to be supplied with the device and therefore reduces manufacturing costs.

A further aspect of the invention will now be described. It is important when multiple cables are pulled that a symmetrical pulling force is exerted and that the tension on each cable is substantially identical. This is because, as previously mentioned, the cables are likely to be damaged if over stretched. Therefore a pulling fuse or similar device is used which will break if a predetermined force is applied during the pulling process and thus prevent the application of an excessive force. In order to ensure that the device severs at the correct point in time, the force applied is required to be a symmetrical one.

In a further aspect, the invention provides a device for pulling a plurality of cables, comprising a base and means for attaching each of the plurality of cables to the base, the attachment means comprising a first central attachment device and an even number of further attachment devices symmetrically surrounding the central device.

Cable has a memory and can become twisted during the installation process. This can slow the process and can potentially lead to damage to the cable due to displacement of the internal conductors. Preferably, therefore, each attachment means is freely rotatable about the base and thus can move with the cable. Preferably each attachment means comprises a quick-release loop to make their use as easy as possible.

In a yet further aspect, the invention provides a device for pulling substantially as herein before described with reference to figures 3a, 3b and 3c.

#### Brief Description of the Drawings

A preferred embodiment of the present invention will now be described, by way of example only, and with reference to the following drawings:

Figure 1 shows the components involved in installing cabling according to the prior art and as discussed hereinbefore;

Figures 2a and 2b show a cable gripper in accordance with a preferred embodiment of the present invention;

Figure 2c is a longitudinal cross-section of the cable gripper prior to the second lock piece being tightened against the first lock piece (not to scale).

Figure 2d is a longitudinal cross-section of the cable gripper after tightening the second lock piece (not to scale);

Figures 3a, 3b and 3c show a device for pulling multiple cables in accordance with a preferred embodiment of the present invention.

#### Detailed Description

Referring to figures 2a, 2b, 2c and 2d, a housing comprises a hollow tubular body 105 for receiving a cable 100 axially within its central bore 105A. A lower portion 110 of the body is threaded. An upper portion 120 has a head 150 with an angled under surface 150A and also a transverse aperture 125 (see figure 2c, 2d) which spans the full width of the body 105. The aperture 125 has an exit 130 through which the free end of the cable 100, which enters the body 105 at its lower end remote from the head 150 and travels up the centre of the body, can be pulled by an installer (as shown in the figure 2a). The aperture 125 extends to an entrance 140 to permit the free end of the cable to be fed back into the body 105 to form a loop 180. The ceiling 165 (figures 2c, 2d) of the aperture 125 is preferably slanted upwardly to the exit 130 so as to guide the cable out through the exit.

A first lock piece 170 slides axially over the tubular body 105 to make contact with the loop at the entrance 140 and exit 130 of the aperture 125 to force the cable against the angled surface 150A of the head 150 at these points. A second lock piece 160 is threaded onto the cylindrical body and can be tightened up against the first lock piece 170 to clamp the cable loop in place.

A helical spring 185 as shown in figure 2c and 2d is under compression between the first and second lock pieces so that the first lock piece 170 is biased towards the head 150. Thus, force has to be applied to this piece 170 in a direction away from the head in order to be able to draw the cable out of the exit 130 and to place the free end of the cable into the entrance 140 of aperture 125 to form the loop 180. The spring sits on a tubular extension 195 of the second lock piece 160. Once the piece 170 is released the spring urges the lock piece 170 back towards the

head in order to temporarily hold the cable in place (as shown in figure 2c) until the second lock piece 160 can be tightened on threads 190 to secure loop 180 (see figure 2d). This effect of the spring means that tightening of the second lock piece is a simple one-handed job. Further the spring ensures that the resting position of the first lock piece is always up against the head and so inhibits dirt from entering the housing and thereby hampering operation of the parts.

In an alternative embodiment, not shown, the aperture 125 may not extend fully across the width of the body 105, but only from the exit 130 to the hollow central bore 105A of the body 105. In this case a recess is formed in the side of the body opposite the exit 130, such recess being located where the entrance 140 is in the illustrated embodiment. In use, the free end of the cable 100 is tucked into this recess and clamped by the first lock piece 170 as before.

In this further embodiment, too, the surface 150A and/or the top end of the lock piece 170 is relieved in the vicinity of the exit 130 so that the cable 100 is only clamped at the free end tucked into the recess. This allows an installer to pull on the cable 100 and for the cable loop 180 to tighten around the device to which it is attached. This variation can also be used where the aperture 125 does extend across the full width of the body 105; in that case the cable is clamped only at the entrance 140.

The disclosed cable gripper provides a simple but effective way of attaching a cable to a pulling fuse or similar device. Unlike the pulling sock it can be dimensioned so as to work with the newer type of cables. Further, much less cable is damaged than with this prior art solution. Only the part of the cable (at least initially) used to form the loop need be thrown away. This is as opposed to the whole length of cable inside the prior art sock. This is due to the way in which the cable is secured which allows the device to be far shorter than the pulling sock, whilst still achieving enough of a clamping force on the cable. The pulling sock is necessarily of a far greater length in order to securely grip the cable. This is because the sock's steel lattice only tightens around the cable as it is pulled. If the sock was any shorter, the cable might well have been pulled out of the sock before the steel lattice had a chance to grip it properly.

Further the cable gripper of the present invention is particularly advantageous because the attachment means is the cable itself (i.e. loop 180). This reduces the number of parts that have to be supplied and so lessens manufacturing costs.



The device can also be made of a lightweight material such as aluminium. Prior art pulling socks are much bigger and therefore heavier. Installers will often be pulling in four cables at a time, each gripped by a pulling sock. The combined weight of the four pulling socks, adds to the force that needs to be exerted to pull the cables into position. However if too great a force is exerted then the cables will be over stretched and thus their internal conductors damaged. As discussed above a pulling fuse or similar device is used which will break when a predetermined force is applied by installers and has to be reset before the installation can continue. Since the predetermined breaking force is typically low when pulling in the more fragile cables (e.g. 4 x 4 pair cables pulled in by hand = 125N), the lighter the cable gripping device is, the better. This is because a heavier device will encourage installers to exert more force during the installation process and thus they are more likely to have to reset the pulling fuse or similar device.

When pulling in multiple cables at once, it is also important that the pulling force exerted is symmetrical. Otherwise it is difficult to ensure that the pulling fuse or similar device will break at the correct predetermined force in order to avoid over stretching the cable. Figures 3a, 3b and 3c show a device for achieving such a symmetrical pulling force in accordance with a preferred embodiment of the present invention.

The device has an octagonal base 200. Four barrels 210, 220, 230 and 240 are placed symmetrically on the base 200 around a centre barrel 250. Each barrel is attached to the base by a swivel bearing 260 which permits each barrel to rotate freely about an axis normal to the base. The spacing of the barrels is chosen so as to ensure that they do not interfere with one another in use. A screw pin 280 is fixed across the diameter of each barrel and provides a point around which to attach a quick release loop 290. The cable loop formed from using the gripper device of the invention is looped over this loop 290 to attach it to the multiple puller device. The underside of the base (as shown in figure 3c) has a single quick release loop 300 attached thereto in register with the centre barrel 250. In use this is attached to the pulling fuse or similar device. (Of course, it may be attached directly to a handle or pulling rope, but this would risk an installer inadvertently damaging the cables by over stretching them.)

The positioning of the number of cables being pulled determines the choice of barrels. For example, an installer pulling four cables should use barrels 210, 220, 230 and 240. On the other hand if only three cables are being pulled, then barrels 210, 250, and 240 or barrels 220, 250 and 230 should be used. Because the barrels can swivel freely, the cable is

GB920020037GB1

7

less likely to the barrels is chosen such that a symmetrical pulling force can be achieved no matter how many cables (up to a maximum of five in this embodiment) are pulled in. In order to be sure of achieving a symmetrical pulling force, become twisted during the installation process. This is important since twists hamper installation and can damage the cable itself.

5

CLAIMS

1. A device for gripping a cable, comprising an elongated housing for slidably receiving the cable axially thereof, the housing being configured to permit an end of the cable to leave the housing and be received back by the housing to form a loop, the device further including means for securing at least the part of the cable received back by the housing.

2. The device of claim 1, wherein the housing is tubular and the cable passes along a central bore of the tube.

3. The device of claim 2, wherein the housing has an aperture which opens in at least one side of the housing, the cable leaving the housing through such aperture.

4. The device of claim 3, wherein the housing has a recess in the side of the housing opposite the aperture opening, the end of the cable being received in such recess.

5. The device of claim 3, wherein the aperture extends fully across the width of the housing to open in the opposite sides of the housing, the cable leaving the housing through one end of the aperture and being received back by the housing through the other end of the aperture.

6. The device of claim 3, 4 or 5, wherein the ceiling of the aperture is slanted to guide the cable out through the aperture.

7. The device of any preceding claim wherein the housing has a head, and said means for securing the cable loop comprises a first lock piece for temporarily holding the cable loop against the head and a second lock piece for securing the first lock piece against the cable loop.

8. The device of claim 7 further comprising a biasing means for biasing the first lock piece towards the head.

9. A device for pulling a plurality of cables, comprising a base and means for attaching each of the plurality of cables to the base, the attachment means comprising a first central attachment device and an even number of further attachment devices symmetrically surrounding the central device.

10. The device of claim 9, wherein each attachment device is freely rotatable about an axis normal to the base.

GB920020037GB1

9

11. The device of claim 9 or 10, wherein each attachment device comprises a quick-release loop.

## ABSTRACT

## CABLE INSTALLATION

5           The invention relates to a device for gripping a cable, comprising an elongated housing for slidably receiving the cable axially thereof. The housing is configured to permit an end of the cable to leave the housing and be received back by the housing to form a loop. The device further includes means for securing at least the part of the cable received back by  
10 the housing.

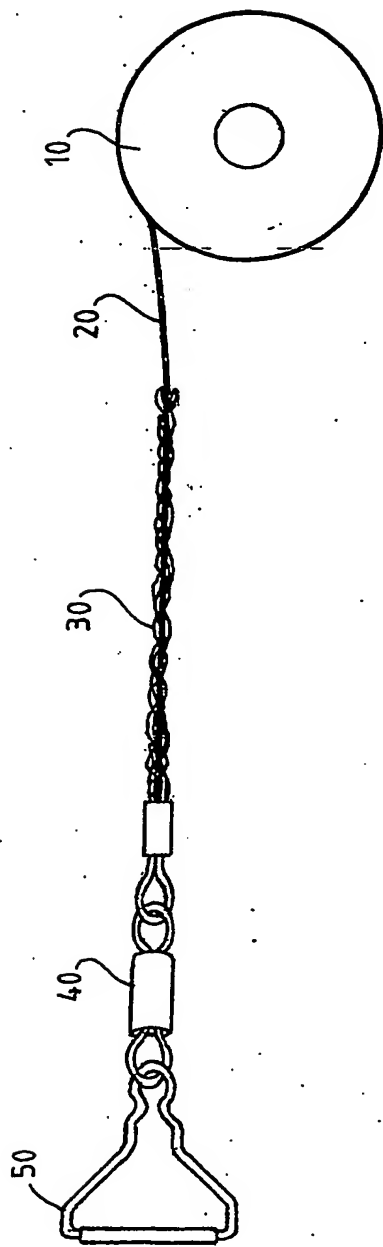


FIG. 1

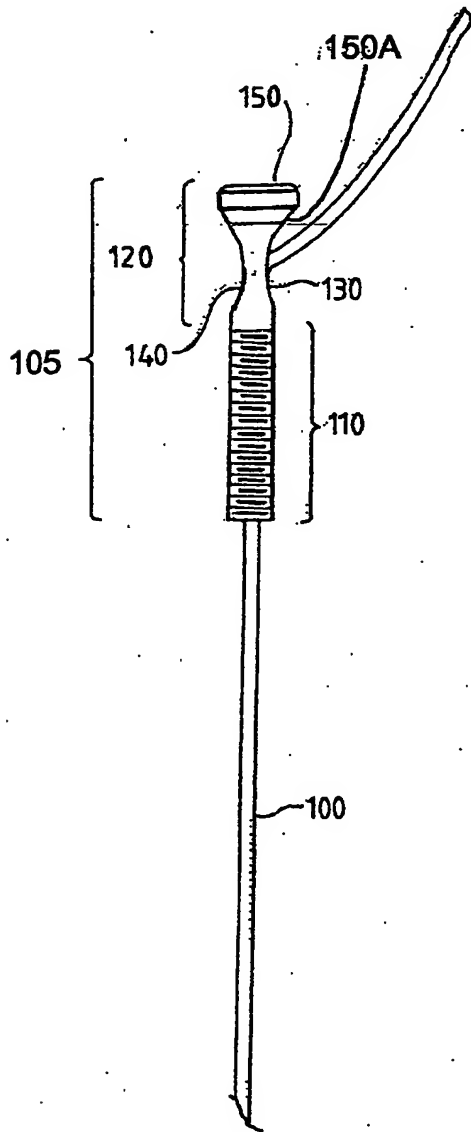


FIG. 2A

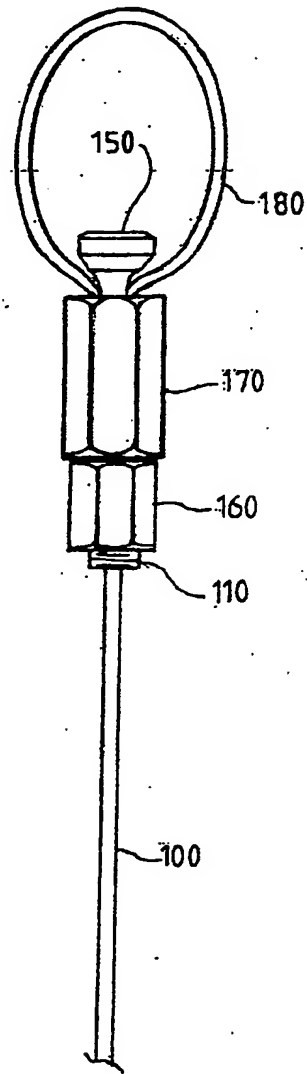


FIG. 2B

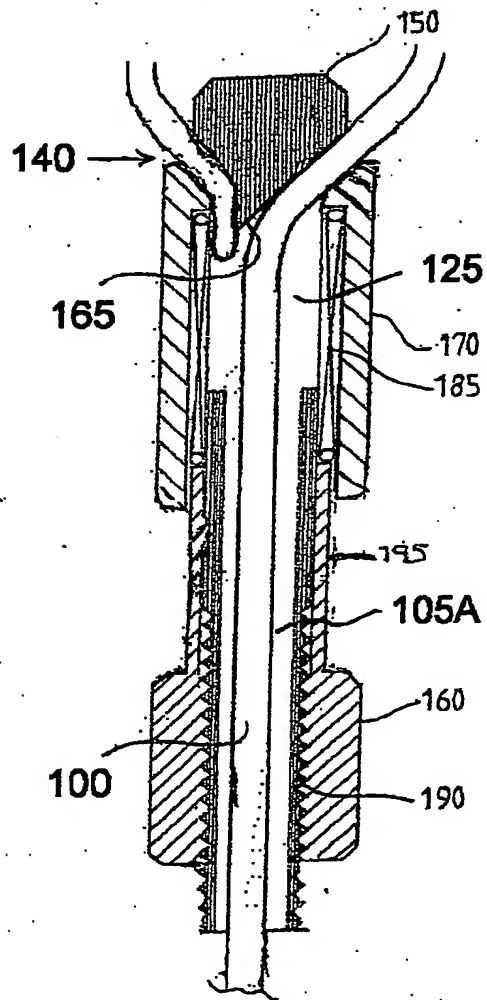


FIG. 2C



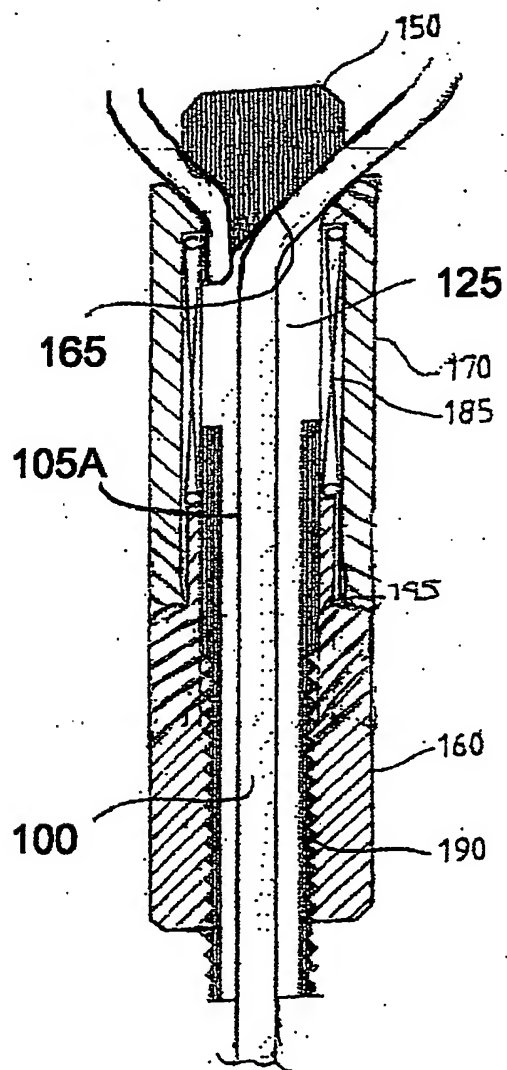


FIG. 2D

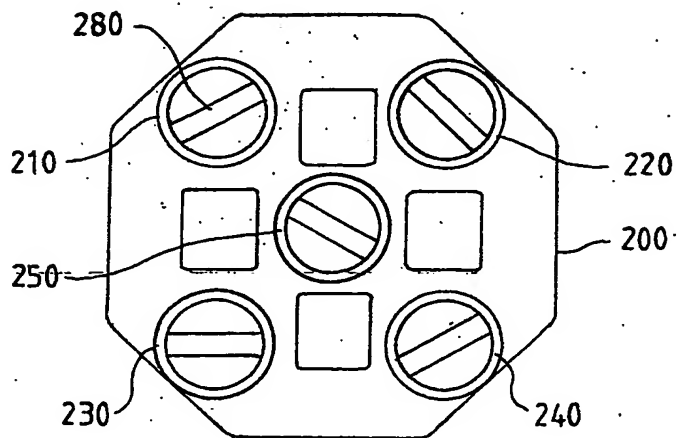


FIG. 3A

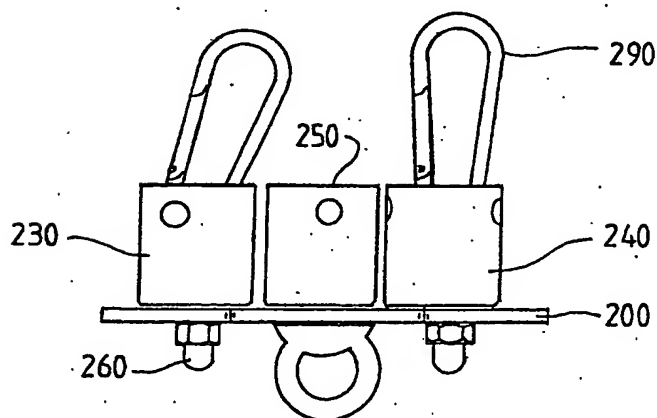


FIG. 3B

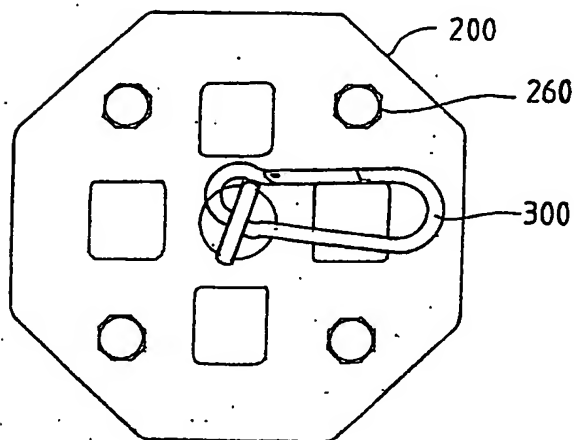


FIG. 3C

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**